

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : E21B 19/22, 43/10, 43/08, B65H 75/34		A1	(11) International Publication Number: WO 00/26500
			(43) International Publication Date: 11 May 2000 (11.05.00)
(21) International Application Number: PCT/EP99/08312		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 28 October 1999 (28.10.99)			
(30) Priority Data: 98308868.3 29 October 1998 (29.10.98) EP			
(71) Applicant (for all designated States except CA): SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V. [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).			
(71) Applicant (for CA only): SHELL CANADA LTD [CA/CA]; 400, 4th Avenue S.W., Calgary, Alberta T2P 2H5 (CA).		Published With international search report.	
(72) Inventor: LOHBECK, Wilhelmus, Christianus, Maria; Volmerlaan 6, NL-2288 GD Rijswijk (NL).			
(54) Title: METHOD FOR TRANSPORTING AND INSTALLING AN EXPANDABLE STEEL TUBULAR			
(57) Abstract			
<p>A method for expanding an expandable steel tubular comprises the steps of: flattening the unexpanded tubular; transporting the flattened unexpanded tubular to a location at or near the site where the tubular is to be installed; unflattening the tubular before positioning the tubular at said site; and expanding the tubular along at least a substantial part of its length before or after the tubular has been positioned at said site.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroun	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD FOR TRANSPORTING AND INSTALLING AN EXPANDABLE
STEEL TUBULAR

Background of the Invention

The invention relates to a method for transporting and installing an expandable steel tubular.

5 An expandable slotted steel tubular is known from European patent specification EP 0643795 and an expandable unslotted or solid tubular made of a formable steel grade is known from International patent application, publication No. WO 98/00626.

10 These prior art references disclose that an essentially conical mandrel may be used to plastically expand the tubular such that the internal and outer diameter of the tubular are increased.

15 A general problem with these and other known steel tubulars is that they are voluminous and fragile elongate pieces of equipment which are difficult to transport from a manufacturing plant to a use site, which results in high transportation and storage costs. Furthermore, a large amount of connectors is required to make up a tubular string.

20 It is an object of the present invention to provide a method which allows a cheap and efficient transport of expandable steel tubulars from a manufacturing plant to an industrial site where the tubular is to be expanded and used.

25 It is observed that it is known from US patent specification No. 3,811,633 to make an extendable tubular structure which is collapsibly folded when wound onto a spool for storage. The known structure thereto comprises a pair of parallel elongated ribbons which are
30 interconnected by profiled side walls which are folded

flat during storage and which are folded out when the tubular is unwound such that a generally square tubular is formed which is neither cylindrical nor expandable.

5 It is observed that is also known in the art to roll hoses that are used e.g. for domestic use or for fire fighting in a flat shape around a reeling drum or in a coil. However, such hoses are made of plastic fabric and/or elastomeric materials which are by their nature already flexible so that flattening can be easily
10 achieved, whereas flattening of steel tubulars for industrial use has not yet been applied.

Therefore, when used in this specification, the term steel tubular excludes an essentially flexible non-metallic hose which is not installed, but used in a
15 movable mode e.g. for domestic, gardening or fire fighting applications.

It is observed that US patent specification No. 3,934,660 discloses a method for in-situ forming a well casing wherein a resilient metal strip is folded
20 into a scrolled shape and maintained in that shape by explosive bolts whereupon the folded casing is inserted into the well. The casing is then installed by releasing the bolts such that the casing unscrolls and presses itself against the borehole wall.

25 The method for transporting and installing a steel tubular in accordance with the pre-amble of claim 1 is known from International patent application WO98/07957. In the known method a tubular steel casing is reeled in a collapsed flattened configuration around a reeling drum.
30 The flattened casing is after unreeling from the drum and before inserting the casing into a borehole further folded into a kidney shape to permit movement of the flattened casing through the borehole. When the folded and flattened kidney-shaped casing has arrived at the
35 downhole location where it is to be installed the kidney-

shaped casing is inflated into a cylindrical shape whereupon an inflatable packer may be inserted into the casing to plastically deform a portion of the upper part of the casing into tight gripping and sealing engagement
5 with an already installed casing section.

The folding of the flattened casing into a kidney shape involves high stresses and if the casing is moved through a curved section of the borehole the casing is bent even further which can easily lead to buckling or
10 rupture of the casing.

The present invention aims to overcome the problems associated with the prior art installation techniques and to provide an installation method which neither requires the folding of the casing into a kidney-shape during
15 installation nor requires the use of a metal strip which unscrolls itself against the borehole or other cavity wall.

Summary of the Invention

The method according to the invention is
20 characterized in that before the tubular is positioned at the site where it is to be installed the tubular is first unflattened into a substantially cylindrical or oval shape and that the thus already unflattened tubular is radially expanded along at least a substantial part of
25 its length after the tubular has been positioned at the site where the tubular is to be installed.

It is observed that surprisingly it has been found that the plastic properties that are required to make steel tubulars sufficiently flexible to make them
30 expandable can also be used to flatten the unexpanded tubular during transport and to unflatten the tubular at the site where it is to be used.

It will be understood that the transport of flattened unexpanded steel tubulars significantly reduces the

volume of the transported tubulars and associated transport costs.

5 Preferably the flattened unexpanded tubular is wound around a reeling drum before transporting the tubular to the site where it is to be used and reeled from the reeling drum before unflattening the tubular.

10 Suitably the tubular is made of a formable steel grade and/or comprises a predetermined pattern of openings or weak spots which open up and are deformed during the expansion process.

15 Preferably said pattern is such that at opposite sides along the circumference of the tubular a longitudinal or helical series of openings or weak spots is arranged which series define a longitudinal or helical band where the tubular wall is folded during the step of flattening the unexpanded tubular.

20 A suitable tubular of the above kind comprises a staggered pattern of elongate slots or elongate weak areas which open up into a substantially prismatic shape during the expansion process. Such an expandable slotted tubular is disclosed in European patent specification EP 0643795. It is observed that when used in this specification the term flattening of a tubular means that the tubular is deformed into a truly flat or sub-
25 stantially oval shape and that the term unflattening of a tubular means that the roundness of the tubular is increased, so that the tubular obtains a substantially cylindrical or oval shape.

30 Experiments have shown that an expandable steel tubular which is equipped with a staggered pattern of partially overlapping axial slots can be flattened such that the opposite tubular walls touch each other when the flattened unexpanded tubular is wound around a reeling drum and that subsequently the unexpanded tubular can be
35 unflattened into a nearly cylindrical shape.

Since if the unflattened tubular is inserted into a cavity, such as a borehole or corroded pipe, that cavity is oversized when compared with the outer diameter of the unexpanded tubular there is no requirement to bring the
5 unexpanded tubular into a perfectly cylindrical shape. Also the expansion of the tubular with e.g. a conical expansion mandrel does not require the use of a perfectly cylindrical unexpanded tubular as a starting point, whereas the conical mandrel will still be able to expand
10 the tubular into a substantially cylindrical shape.

Expandable solid tubulars made of a formable steel grade preferably are flattened into a substantially oval shape when they are reeled around a reeling drum, whereas the roundness of the unexpanded tubular is increased
15 before the expansion process. Again expansion of the tubular using an expansion cone still resulted in a substantially cylindrical expanded tubular.

Thus it will be understood that flattening of expandable tubulars significantly reduces transport and storage cost since the storage of tubulars which are both
20 unexpanded and flattened has synergetic effects, whereas the temporary flattening during transport and storage has no effect on the roundness of the expanded tubular.

It is preferred that the tubular is unflattened by moving the flattened unexpanded tubular in a longitudinal direction through a funnel arrangement which comprises a
25 tubular opening formed by series of rollers and/or a tubular guide funnel, which opening has an inner diameter which is substantially equal to the outer diameter of the unexpanded unflattened tubular.
30

The method according to the present invention is very suitable for use with expandable tubulars which are made of a formable steel grade and are in use inserted into an underground wellbore or corroded pipe and then expanded
35 to form a steel lining in the wellbore or existing pipe.

When used in this specification the term formable steel grade means that the steel is subject to substantial strain hardening as a result of the expansion process. Preferably the tubular is made of a high
5 strength steel grade with formability and having a yield strength-tensile strength ratio which is lower than 0.8 and a yield strength of at least 275 MPa. Suitable steels of this kind are dual phase (DP) high strength, low alloy (HSLA) steels having a strain hardening exponent n of at
10 least 0.6, and preferably at least 0.16.

If the tubular is to be inserted into a tubular cavity, such as a wellbore or subsurface or above-ground pipeline, and to be moved in a centralised position through the cavity then the tubular may be equipped with
15 a series of bow spring centralisers which are at at least one end slidably secured to the outer surface of the tubular and which centralisers are also flattened when the unexpanded tubular is flattened and which deform into a low shape when the tubular is unflattened.

20 If the tubular is slotted and to be used in an area where an impermeable tubular wall is required then an impermeable wrapping or elastomeric sleeve may be arranged around the tubular to provide a fluid seal.

Suitably the tubular is expanded by an expandable
25 expansion mandrel which is inserted into the unexpanded unflattened tubular in its retracted shape and subsequently expanded and moved in an axial direction through the tubular during the tube expansion process.

Brief Description of the Drawing

30 The invention will now be described in more detail and by way of example with reference to the accompanying drawings in which:

Fig. 1 is a three-dimensional view of an expandable
35 slotted tubular of which the upper end is flattened and which is moved through a funnel arrangement which brings

the tubular into the substantially cylindrical shape shown at the bottom;

Fig. 2 shows the tubular of Fig. 1 during the expansion process wherein a conical expansion mandrel is pulled through the tubular;

Fig. 3 is a schematic side view of an unexpanded expandable conical mandrel for use in expanding the slotted tubular of Fig. 2;

Fig. 4 is a schematic side view of the expanded conical mandrel of Fig. 3 while expanding the tubular of Fig. 2; and

Fig. 5 is a three-dimensional view of an alternative embodiment of an expandable mandrel for use in the method according to the invention.

Detailed Description of Preferred Embodiments

Preferring now to Fig. 1 there is shown an unexpanded expandable slotted tube 1 of which the upper end has been flattened and the lower end has been brought into a substantially cylindrical shape by a funnel arrangement 2.

The funnel arrangement 2 comprises a pair of guide wheels 3 which have a semi-circular outer surface 4 which push the tubular 1 into a substantially cylindrical shape and a guide ring 5 having an inner surface of a low friction material, which ring 5 serves to guide the tubular 1 into the wellbore 6 of a borehole traversing a subsurface earth formation 7.

The tubular 1 comprises a regular pattern of at least partly overlapping staggered slots 8 which have been cut through or partly through the wall of the tubular 1 at a manufacturing plant. At the manufacturing plant the tubular has been flattened by pulling the tubular 1 through a pair of rollers (not shown) which have a substantially flat outer surface and which are spaced apart at a distance which is equal to about three times

the wall thickness of the tubular 1. At the manufacturing plant the flattened tubular 1 is wound around a reeling drum 9 which is subsequently transported to the well site where the tubular 1 is again wound from the reeling drum 9, and subsequently unflattened in the guide funnel arrangement 2 and lowered into the underground wellbore 6.

To allow a smooth decent of the unexpanded tubular 1 into the wellbore 6 an end ring 17 or nose section may be secured to the lower end of the unflattened tubular 1. Preferably the end ring 17 or nose section is made of a relatively soft material, such as aluminium, plastic, or cement which easily deforms and/or breaks during the expansion process and which can, if necessary, be removed easily thereafter by a drilling or milling tool.

The upper end of the end ring 17 may be provided with a series of parallel axial slots 18 (not shown) which correspond to the slots 8 at the lower end of the tubular 1. The fingers 19 formed between the slots 18 and 8 at the upper end of the end ring 17 and the lower end of the lower end of the tubular 1 may be connected to each other by screws, or by bonding, welding or brazing. The fingers 19 at the upper end of the end ring 17 allow full expansion of the lower end of the slotted tubular 1 during the expansion process.

If also the upper end of the tubular 1 is to be lowered into the wellbore 7 a so-called ball grab tool (not shown) may be inserted into the upper end of the unflattened tubular 1. The ball grab tool is to be provided with a sleeve which surrounds the upper end of the tubular 1 to prevent expansion of the upper end of the tubular 1 when the ball grab tool is expanded to grip the upper end of the tubular.

The ball grab tool may be suspended at the lower end of a hoisting cable or tubing string which is lowered

into the wellbore 7 until the tubular 1 has arrived at the location in the wellbore 7 where it is to be used. Depending on the circumstances the ball grab tool may be removed before, during or at the end of the tube expansion process which is described with reference to Fig. 2.

Referring now to Fig. 2 there is shown the tubular 1 of Fig. 1 after it has been lowered into the underground borehole 6 and while the tubular 1 is being expanded by pulling an expansion mandrel (not shown) by means of a pulling pipe 10 in upward direction through the tubular 1 as illustrated by arrow 11.

As a result of the expansion process the staggered elongate longitudinal slots 8 open up into a substantially prismatic shape as shown at the bottom of Fig. 2.

In order to centralise the unexpanded tubular 1 in the wellbore 6 during its descent and expansion a series of bow spring centralisers 12 is provided at regular spacings on the outer surface of the tubular 1.

Each centraliser 12 is fixed at its lower end to the tubular 1 by means of a bolt or rivet 13 and is at its upper end slidably secured to the tubular 1 by means of a bolt (not shown) which is allowed to slide through a longitudinal groove (not shown) in the centraliser 12 so that the centralisers are allowed to be flattened as a result of the expansion process as illustrated by the arrows 14 and as illustrated in the middle of Fig. 2.

At a location where influx of fluids from the surrounding earth formation 7 into the wellbore 6 is to be prevented an impermeable wrapping 15 is arranged around the tubular 1. During the expansion process diameter of the wrapping 15 is increased and the wrapping 15 is squeezed and firmly fixed between the expanded tubular 1 and the borehole wall 16.

The wrapping 15 may consist of a fabric which is impermeable or made impermeable after the expansion process by impregnating the fabric with a resin that cures downhole and which fabric is scrolled around the tubular 1. Alternatively the wrapping 15 may consist of a rubber or elastomeric sleeve which is stretched as a result of the expansion process or a scrolled or diaphragm type sheet or plate where the amount of overlap is reduced as a result of the expansion process.

Fig. 3 and 4 show an expandable expansion mandrel 20 for use in the expansion process illustrated in Fig. 2.

The mandrel 20 is shown in Fig. 3 in its unexpanded shape which allows the mandrel to be lowered through the unexpanded tubular 1 before the expansion process.

The mandrel 20 comprises a series of fingers 21 which are formed at the lower end of the pulling pipe 10 by cutting parallel axial slots 22 at regular distances through the wall of the pulling pipe 10 between the lower end 24 of the pulling pipe 10 and a circumferential groove 23 that has been machined in the inner wall of the pulling pipe 10.

A conical plunger 25 is located at the lower end 24 of the pulling pipe 10. The plunger 25 is suspended from a pulling rod 26 which can be pulled up and down through the interior of the pulling pipe as illustrated by arrow 27.

Fig. 4 shows the expansion mandrel of Fig. 3 in its expanded shape after the conical plunger 25 has been pulled up by means of the pulling rod 26.

The upward motion of the conical plunger 25 has caused the fingers 21 to flex outward wherein the area of reduced pipe wall thickness surrounding the groove 23 where the pipe acts as a hinge.

The pipe wall surrounding the groove 23 is plastically deformed by the upward motion of the conical

plunger 25 so that when the plunger 25 is pushed downward through the pulling pipe 10 at the end of the expansion process the fingers 21 can be pushed back plastically when a restriction is passed to their longitudinal orientation as is shown in Fig. 3.

Fig. 5 shows an alternative configuration of an expansion mandrel wherein a series of arms 30 are secured to the lower end of a pulling pipe 31 by means of hinges 32.

A second series of arms 33 is secured by means of a series of hinges 34 to an end ring 35.

The arms 30 and 33 are slidably arranged around an internal cone 36.

The arms 32 and 33 can be pushed out into the expanded position shown by pulling the end ring 35 and cone 36 at different speeds towards the lower end of the pulling pipe 31 by pulling a rod 36 up through the pipe 31.

The arms 32 and 33 can be retracted into a stretched configuration by pushing the rod 36 down through the pulling pipe 31 which induces the free ends of the arms 30 and 33 to slide back towards the tips of the cone 36.

The expandable and retractable expansion mandrels shown in Figs. 3, 4 and 5 are particularly suitable for expanding slotted tubulars 1 which have been flattened during transport and storage since the unflattened tubular 1 does not need to be perfectly round to lower the mandrel through the unexpanded tubular and sufficient clearance is left to allow the unexpanded mandrel to be lowered to the bottom of the unexpanded tubular.

Experiments have shown that the process of flattening a tubular during transport and storage and subsequent unflattening and expansion of the tubular cannot only be used with slotted tubulars as shown in Fig. 1 and 2 but

also with unslotted tubulars, provided that with
unslotted tubulars the flattening is preferably limited
such that the tubulars have a substantially oval shape
when it is reeled around a reeling drum and flattened to
5 about six times the wall thickness of the tubular.

C L A I M S

1. A method for transporting and installing a steel tubular (1), the method comprising
 - flattening the tubular (1);
 - transporting the flattened tubular (1) to the site (6) where the tubular (1) is to be installed; and
 - unflattening the tubular (1); characterized in that
 - before positioning the tubular at said site (6) the tubular (1) is unflattened; and that
 - the tubular (1) is expanded along at least a substantial part of its length after the tubular (1) has been positioned at said site (6).
2. The method of claim 1, wherein the flattened unexpanded tubular (1) is wound around a reeling drum (9) before transporting the tubular (1) to said site (6) and reeled from the reeling drum (9) before unflattening the tubular (1).
3. The method of claim 1, wherein the unexpanded tubular (1) comprises a predetermined pattern of openings or weak spots (8) which open up and are deformed during the expansion process.
4. The method of claim 3, wherein said pattern is such that at opposite sides along the circumference of the tubular a longitudinal or helical series of openings or weak spots (8) is arranged which series define a longitudinal or helical band where the tubular wall is folded during the step of flattening the unexpanded tubular (1).
5. The method of claim 3, wherein the tubular (1) comprises a staggered pattern of elongate slots (8) or elongate weak areas which open up into a substantially prismatic shape during the expansion process.

6. The method of claim 1, wherein the tubular (1) is unflattened by moving the tubular into a funnel arrangement (2).
7. The method of claim 6, wherein the funnel arrangement (2) comprises a tubular opening formed by a series of rollers (3) and/or a tubular guide funnel (5), which opening has an inner diameter which is substantially equal to the outer diameter of the unexpanded unflattened tubular (1).
8. The method of claim 1, wherein the tubular (1) is inserted in its unflattened, unexpanded and substantially cylindrical or oval shape into an underground borehole or other cavity (6) and expanded alongside the inner wall (16) of the cavity (6) in order to form a tubular lining of said cavity (6).
9. The method of claim 1, wherein the tubular (1) is an oilfield tubular and is made of a formable steel grade.
10. The method of claim 9, wherein the tubular (1) is equipped with a series of bow spring centralisers (12) which are at at least one end slidably secured to the outer surface of the tubular and which centralisers (12) are also flattened when the unexpanded tubular (1) is flattened and which deform into a bow shape when the tubular (1) is unflattened.
11. The method of claim 9, wherein the tubular (1) is a slotted tubular for use in an underground borehole (6) and is provided with an impermeable wrapping (15) at locations where an impermeable expanded tubular (1) is required.
12. The method of claim 11, wherein the impermeable wrapping (15) consists of a deformable rubber sleeve and/or a scrolled sheet of an impermeable or made impermeable in-situ fabric material.
13. The method of claim 11, wherein the tubular (1) is expanded by an expandable expansion mandrel (20,30-36)

which is inserted into the unexpanded unflattened tubular in its retracted shape and subsequently expanded and moved in an axial direction through the tubular (1) during the expansion process.

Fig.1.

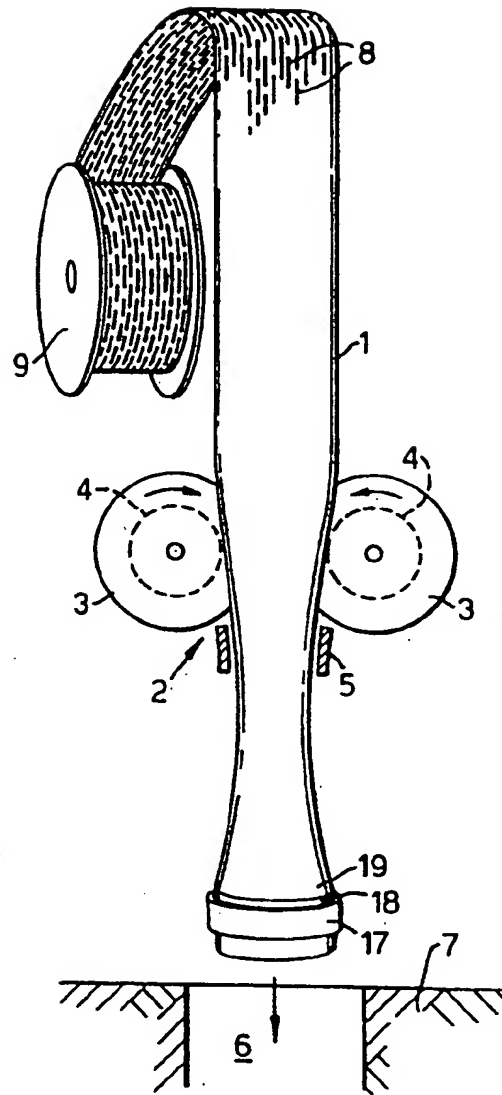


Fig.2.

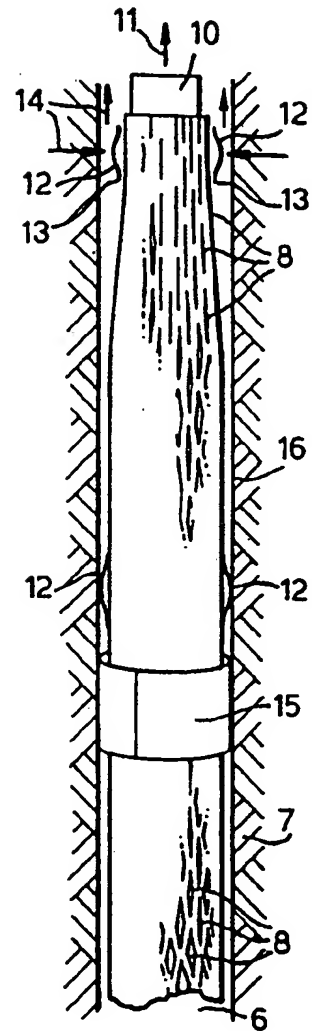


Fig.3.



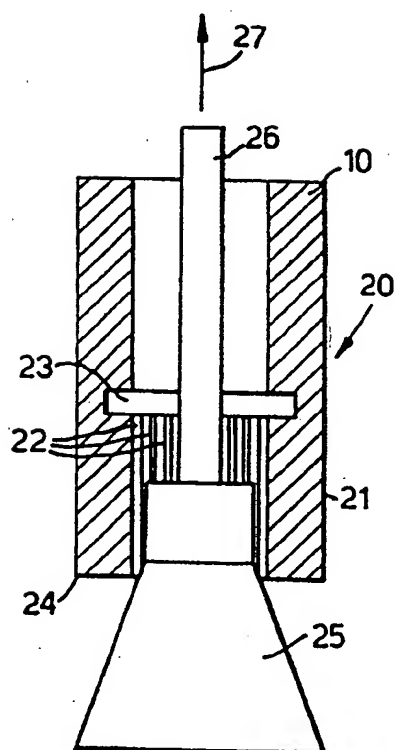


Fig.4.

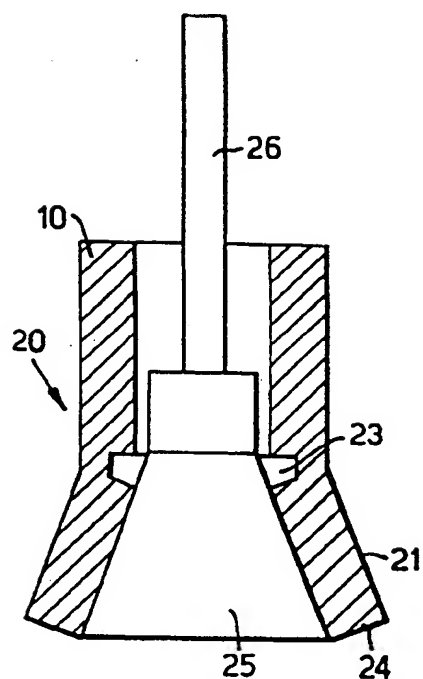

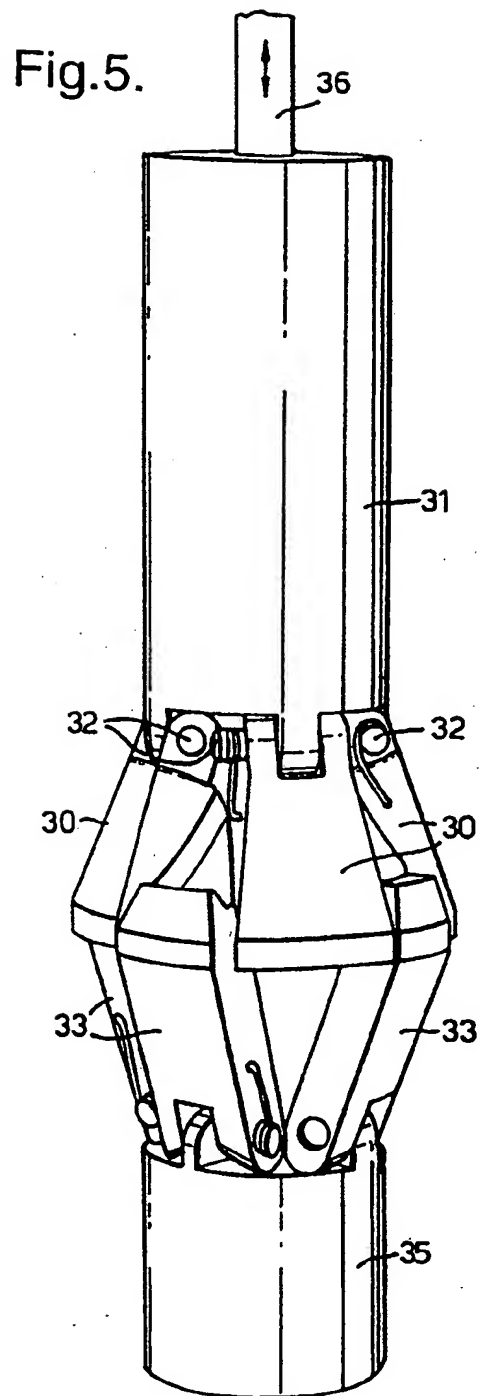

SUBSTITUTE SHEET (RULE26)

INTERNATIONAL SEARCH REPORT

Int. Application No.

PCT/EP 99/08312

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E21B19/22 E21B43/10 E21B43/08 B65H75/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B B65H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 934 660 A (NELSON) 27 January 1976 (1976-01-27) cited in the application column 6, line 43 - column 7, line 20 column 6, line 38 - line 42 column 3, line 14 - line 19	1
A	WO 98 07957 A (NOBILEAU) 26 February 1998 (1998-02-26) cited in the application claim 1 column 7, line 8 - line 11	1
A	US 4 681 169 A (BROOKBANK) 21 July 1987 (1987-07-21) column 2, line 14 - line 17 column 2, line 28 - line 47	1
-/-		

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

15 February 2000

Date of mailing of the international search report

24/02/2000

Name and mailing address of the ISA

European Patent Office, P.O. 6818 Patentlaan 2
NL - 2200 HV Rijswijk
Tel. (+31-70) 540-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 540-3016

Authorized officer

Sogno, M

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 99/08312

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 93 25800 A (SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.) 23 December 1993 (1993-12-23) cited in the application abstract	1
A	WO 98 00626 A (SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.) 8 January 1998 (1998-01-08) cited in the application abstract claim 15	1
A	US 3 811 633 A (CUMMINGS) 21 May 1974 (1974-05-21) cited in the application abstract	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Appl. No.

PCT/EP 99/08312

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3934660 A	27-01-1976	NONE	
WO 9807957 A	26-02-1998	US 5794702 A AU 3781197 A EP 0918917 A NO 990692 A	18-08-1998 06-03-1998 02-06-1999 14-04-1999
US 4681169 A	21-07-1987	NONE	
WO 9325800 A	23-12-1993	AU 672008 B AU 4324593 A CA 2137565 A DE 69305852 D DE 69305852 T DK 643795 T EP 0643795 A JP 7507611 T MD 960219 A NO 944746 A NZ 253125 A US 5366012 A	19-09-1996 04-01-1994 23-12-1993 12-12-1996 22-05-1997 14-04-1997 22-03-1995 24-08-1995 31-05-1997 03-02-1995 27-02-1996 22-11-1994
WO 9800626 A	08-01-1998	AU 3442097 A BR 9710016 A CA 2260191 A EP 0907822 A NO 986171 A	21-01-1998 10-08-1999 08-01-1998 14-04-1999 22-02-1999
US 3811633 A	21-05-1974	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.